


### X-Pol Hex-Port 6 ft 60° Fast Roll Off antenna with independent tilt on 700 & 850 MHz:

2 ports 698-798, 824-894 MHz and 4 ports 1695-2200 MHz

- Fast Roll Off (FRO™) azimuth beam pattern improves Intra- and Inter-cell SINR
- Compatible with dual band 700/850 MHz radios with independent low band EDT without external diplexers
- Fully integrated (iRETs) with independent RET control for low and high bands for ease of network optimization
- SON-Ready array spacing supports beamforming capabilities
- Suitable for LTE/CDMA/PCS/UMTS/GSM air interface technologies
- Integrated Smart Bias-Ts reduce leasing costs

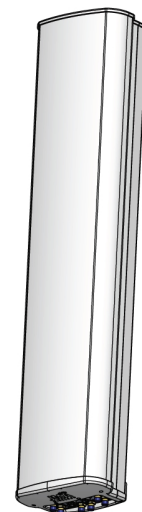

#### Fast Roll-Off antennas increase data throughput without compromising coverage



The horizontal beam produced by Fast Roll-Off (FRO) technology increases the Signal to Interference & Noise Ratio (SINR) by eliminating overlap between sectors.

##### Non-FRO antenna

Large traditional antenna pattern overlap creates harmful interference.

##### JMA FRO antenna

JMA's FRO antenna pattern minimizes overlap, thereby minimizing interference.



LTE throughput	SINR	Speed (bps/Hz)	Speed increase	CQI
Excellent	>18	>4.5	333+%	8-10
Good	15-18	3.3-4.5	277%	6-7
Fair	10-15	2-3.3	160%	4-6
Poor	<10	<2	0%	1-3

The LTE radio automatically selects the best throughput based on measured SINR.

Electrical specification (minimum/maximum)	Ports 1, 2		Ports 3, 4, 5, 6		
	Frequency bands, MHz	698-798	824-894	1695-1880	1850-1990
Polarization	± 45°		± 45°		
Average gain over all tilts, dBi	14.4	14.0	17.6	18.0	18.2
Horizontal beamwidth (HBW), degrees	60.5	53.0	55.0	55.0	55.5
Front-to-back ratio, co-polar power @180°± 30°, dB	>24	>24.0	>25.0	>25.0	>25.0
X-Pol discrimination (CPR) at boresight, dB	>15.0	>14.2	>18	>18	>15
Sector power ratio, percent	<3.5	<3.0	<3.7	<3.8	<3.6
Vertical beamwidth (VBW), degrees <sup>1</sup>	13.1	11.8	6.0	5.5	5.5
Electrical downtilt (EDT) range, degrees	2-14	2-14	0-9		
First upper side lobe (USLS) suppression, dB <sup>1</sup>	≤-15.0	≤-16.5	≤-16.0	≤-16.0	≤-16.0
Cross-polar isolation, port-to-port, dB <sup>1</sup>	25	25	25	25	25
Max VSWR / return loss, dB	1.5:1 / -14.0		1.5:1 / -14.0		
Max passive intermodulation (PIM), 2x20W carrier, dBc	-153		-153		
Max input power per any port, watts	300		250		
Total composite power all ports, watts	1500				


<sup>1</sup> Typical value over frequency and tilt



# MX06FRO660-03

## NWAV™ X-Pol Hex-Port Antenna

Mechanical specifications	
Dimensions height/width/depth, inches (mm)	71.3/ 15.4/ 10.7 (1811/ 392/ 273)
Shipping dimensions length/width/height, inches (mm)	82/ 20/ 15 (2083/ 508/ 381)
No. of RF input ports, connector type, and location	6 x 4.3-10 female, bottom
RF connector torque	96 lbf-in (10.85 N·m or 8 lbf-ft)
Net antenna weight, lb (kg)	66.2 (30.0)
Shipping weight, lb (kg)	103.8 (47.1)
Antenna mounting and downtilt kit included with antenna	91900318
Net weight of the mounting and downtilt kit, lb (kg)	18 (8.18)
Range of mechanical up/down tilt	-2° to 14°
Rated wind survival speed, mph (km/h)	150 (241)
Frontal and lateral wind loading @ 150 km/h, lbf (N)	105.1 (467.5), 78.6 (349.6)
Equivalent flat plate @ 100 mph and Cd=2, sq ft	2.6
EPA frontal and lateral, ft <sup>2</sup> , (m <sup>2</sup> )	4.7 (0.44), 2.4 (0.22)

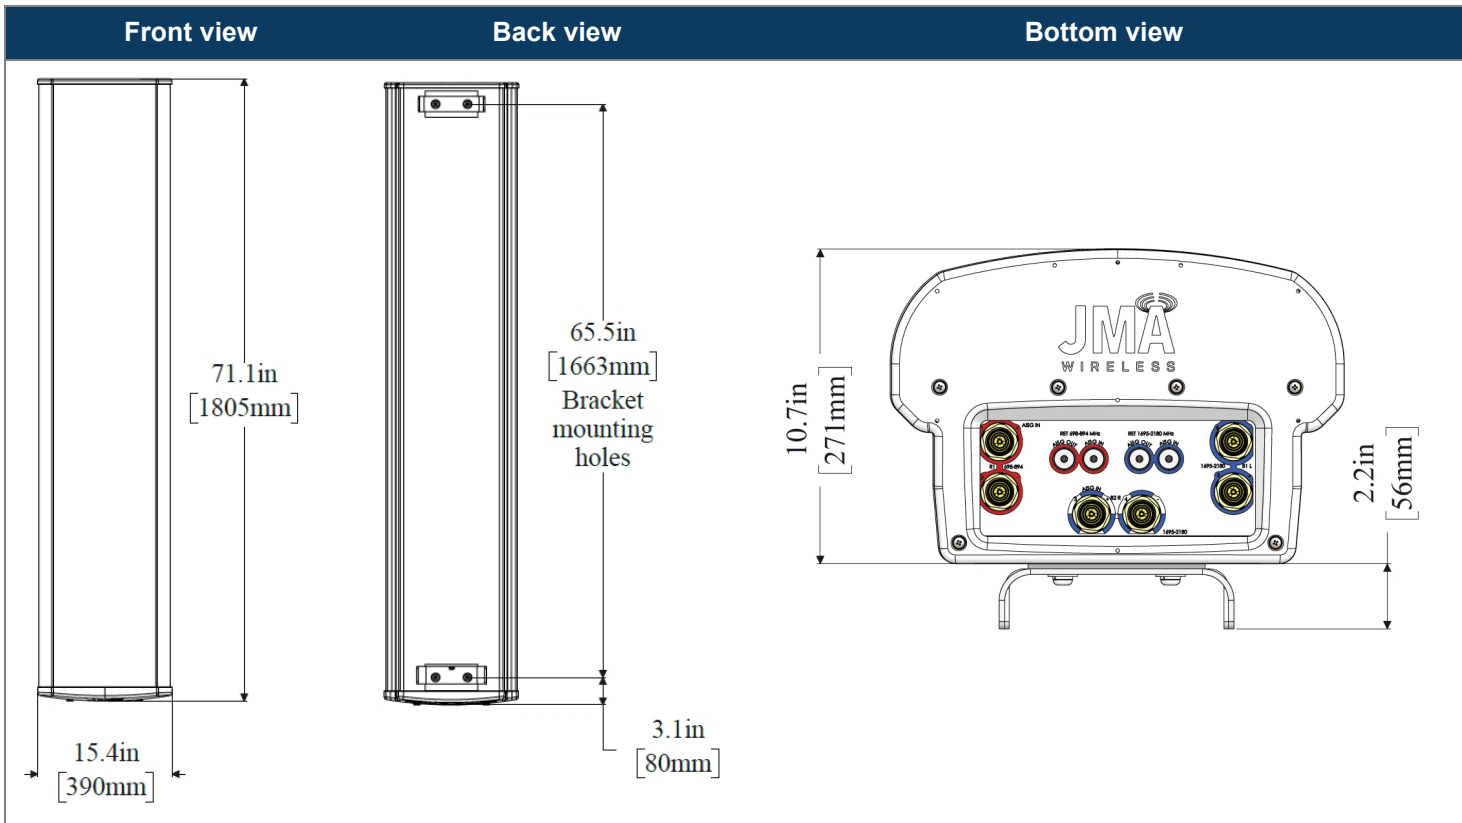

Ordering information	
Antenna model	Description
MX06FRO660-03	6F X-Pol HEX FRO 60° independent tilt 700/850 RET, 4.3-10 & SBT
Optional accessories	
<a href="#">AISG cables</a>	M/F cables for AISG connections
<a href="#">PCU-1000 RET controller</a>	Stand-alone controller for RET control and configurations
<a href="#">91900314-02</a>	Dual Mount Bracket (see 91900314 bracket document for details)

### Remote electrical tilt (RET 1000) information


RET location	Integrated into antenna
RET interface connector type	8-pin AISG connector per IEC 60130-9
RET connector torque	Min 0.5 N·m to max 1.0 N·m (hand pressure & finger tight)
RET interface connector quantity	2 pairs of AISG male/female connectors
RET interface connector location	Bottom of the antenna
Total no. of internal RETs (low bands)	2
Total no. of internal RETs (high bands)	1
RET input operating voltage, vdc	10-30
RET max power consumption, idle state, W	≤ 2.0
RET max power consumption, normal operating conditions, W	≤ 13.0
RET communication protocol	AISG 2.0 / 3GPP

### RET and RF connector topology

Each RET device can be controlled either via the designated external AISG connector or RF port as shown below:

RET device	Band	RF port
R1	698-798	1-2
R2	824-894	1-2

RET device	Band	RF port
B1/B2	1695-2200	3-6

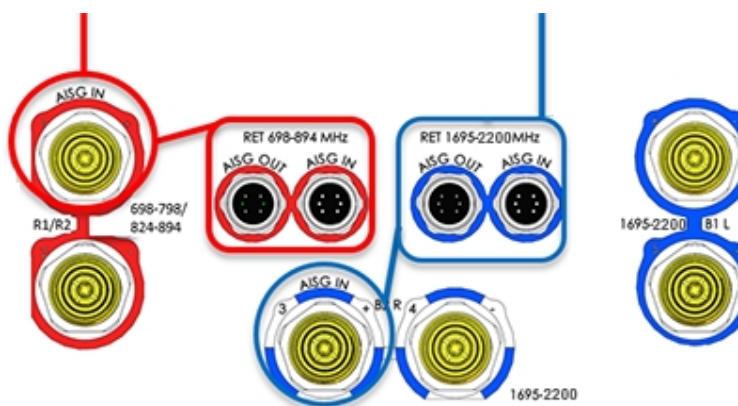

### Array topology

3 sets of radiating arrays  
 R1/R2: 698-798 / 824-894 MHz  
 B1: 1695-2200 MHz  
 B2: 1695-2200 MHz

Band	RF port
1695-2200	3-4
698-798 / 824-894	1-2
1695-2200	5-6

