



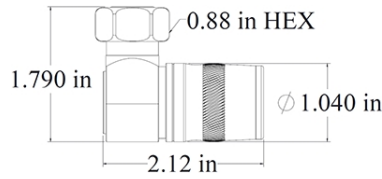

UPL-4RT-12T

4.3-10 Right Angle Connector for 1/2" Trilogy Plenum Cable

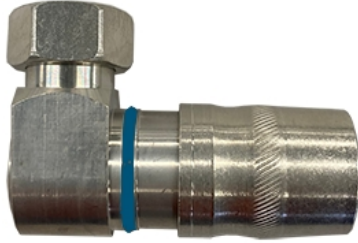

[Installation video](#)



[Installation instructions](#)



Contact technical support:
1-888-201-6073
techsupport@jmawireless.com

General		Specification	
Interface/gender	4.3-10 Right angle male		
Cables supported¹	Manufacturer	P/N	
	Trilogy	AP6012J50	
		APC012J50	
		AC012R50	
		AC012J50	
		AP012U50	
		ACC012J50	
ACC012R50			
Weight	172.8 g 0.381 lb		
JMA Weather Protection System	N/A		
Tools required	JMA part number	Comment	
Cable preparation	SP-12PL-01		
Torque wrench	TQ-78-F8	8 lbf-ft 10.85 N·m	

	Compression tool	Frameset	Insert
Connector compression options	HCG-CC (RP 240 / RP 210-B / RP 100-B)	HCG-FS-12-01	HCG-INS2-12-01 (Insert 2)
	HCG-CC (RP 240 / RP 210-B / RP 100-B)	HCG-FRAMESET-1/2	HCG-INSERTA-1/2 (Insert A)

Frequency band	VSWR	Return loss (dB)
555–1000 MHz	1.02	40
1000–2700 MHz	1.03	36
2700–3800 MHz	1.05	32
3800–6000 MHz	1.08	28

Electrical	Specification	Comment
Connector impedance	50 ohm	
Operating frequency band	DC–6 GHz	
3rd order IMD dynamic, (PIM)	-161 dBc, typical	IEC 62037-2
DC test voltage	2500 V	
Center contact resistance	≤ 1.0 milliohm	
Outer contact continuity	1.0 milliohm max.	
Average power	600 W @ 900 MHz	
Peak power, max.	15 kW	
Insertion loss, typical	0.05 dB	Per connector
Shielding effectiveness	< -120 dB	@ 0-1 GHz

Mechanical	Specification	Comment
Pull force combined	.89 kN > 200 lb	Cable limited
Cable retention torque	6.7 N·m 5 lbf-ft	Cable limited
Interface durability	100 cycles	IEC 61169-4:9.5

¹For cable types not listed, please contact JMA Technical Support.



UPL-4RT-12T

4.3-10 Right Angle Connector for 1/2" Trilogy Plenum Cable

Environmental	Specification	Test
Operating temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Accelerated UV	1000 hr	ASTM G154
Immersion test method	Mated & unmated, IP68	IEC 60529:2001 & ANSI/SCTE 60
Water jetting test method	Mated & unmated, IP66	IEC 60529:2001
Mechanical shock test method	Pass	IEC 60068-2-27
Thermal shock test method	Pass	IEC 60068-2-14
Vibration test method	100 m/s ² , 2 Hz to 200 Hz	IEC 61169-1:2003
Corrosion test method	1000 hr	IEC 60068-2-11

05/05/26