UXP-DM-78

7-16 DIN Male Connector for 7/8” Annular Cable

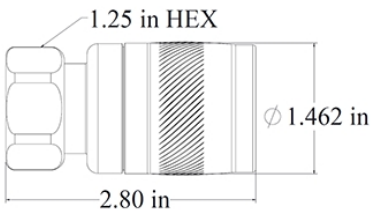

Installation video

Installation instructions

Contact technical support:
1-888-201-6073
techsupport@jmawireless.com

General	Specification			
Interface/gender	7-16 DIN Male			
Cables supported[1]	**Manufacturer**	**P/N**	**Manufacturer**	**P/N**
	CommScope	AVA5, AVA5RK	Eupen	EC5
		AL5	GT-SAT	HCTAY-50-22
		LDF5	Leoni Flexline	7/8"R
		VXL5	LS/Superior Essex	LHF 22D
	RFS	LCF78		LHF-22DU
		LCF78-50JL	Hansen	RF5078
		UCF78	Rosenberger	SL 7/8"
	NK Draka	RFA78	Hengxin	HCTAY-50-22
Weight	0.629 lb | 285.3 g			
JMA Weather Protection System	WPS-5			

Tools required	JMA part number	Comment
Cable preparation	SP-78	No coring required
Connector compression	HCG-FRAMESET-7/8, HCG-CC	
Torque wrench	TQ-114-F18	18 lbf·ft | 24.4 N·m

Frequency band	VSWR	Return loss (dB)
DC-1000 MHz	1.02	40
1000–2000 MHz	1.03	36
2000–4000 MHz	1.05	32
4000–6000 MHz	1.08	28

Electrical	Specification	Comment
Connector impedance	50 ohm	
Operating frequency band	DC–6 GHz	
3rd order IMD dynamic, (PIM)	-161 dBc, typical	IEC 62037-2, -3
DC test voltage	4000 V	
Center contact resistance	≤0.4 milliohm	
Outer contact continuity	1.5 milliohm max.	
Average power	3000 W @ 900 MHz	
Peak power, max.	40 kW	
Insertion loss, typical	0.05 dB	Per connector
Shielding effectiveness	< -130 dB	@ 0-1 GHz

Mechanical	Specification	Comment
Pull force combined	1.56 kN | > 350 lb	Cable limited
Cable retention torque	21.69 N·m | 16 lbf·ft	Cable limited
Interface durability	500 cycles	IEC 61169-4:9.5

[1]For cable types not listed, please contact JMA Technical Support.

©2023 JMA Wireless. All rights reserved. This document contains proprietary information. All products, company names, brands, and logos are trademarks™ or registered® trademarks of their respective holders. All specifications are subject to change without notice. +1 315.431.7100 customerservice@jmawireless.com

Environmental	Specification	Test
Operating temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Accelerated UV	1000 hr	ASTM G154
Immersion test method	Mated & unmated, IP68	IEC 60529:2001 & ANSI/SCTE 60
Water jetting test method	Mated & unmated, IP66	IEC 60529:2001
Mechanical shock test method	Pass	IEC 60068-2-27
Thermal shock test method	Pass	IEC 60068-2-14
Vibration test method	100 m/s^2, 2 Hz to 200 Hz	IEC 61169-1:2003
Corrosion test method	1000 hr	IEC 60068-2-11

07/18/23

©2023 JMA Wireless. All rights reserved. This document contains proprietary information. All products, company names, brands, and logos are trademarks™ or registered® trademarks of their respective holders. All specifications are subject to change without notice. +1 315.431.7100 customerservice@jmawireless.com