




UXP-NRA-12

N Male Right Angle Connector for 1/2" Annular Cable

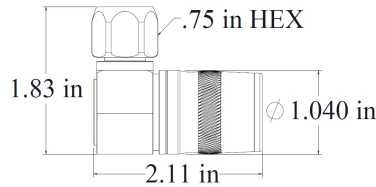

[Installation video](#)



[Installation instructions](#)



Contact technical support:
1-888-201-6073

techsupport@jmawireless.com

General		Specification			
Interface/gender		N right angle			
Cables supported¹	Manufacturer	P/N		Manufacturer	P/N
		JMA Wireless	JMA12-50 JMA12R-50	Wireless Supply	WS12 EC4
	CommScope	LDF4		Eupen	Leoni Flexline 1/2"R
		LDF4RK		LS/Superior Essex	HFC 12D
		LDF4 RN			HFAC 12D
	RFS	LCF12		Hansen	RF5012
		LCF12-50JL			RF5012Z
	NK Draka	RFA1200		Belden	RA500
Rosenberger	SL 1/2" R		RA500R		
Weight		0.360 lb 163.3 g			
JMA Weather Protection System		Boot: WPS-NRA-4A Port seal: WPS-NF			
Tools required		JMA part number		Comment	
Cable preparation		SP-1/2-LDF4D		"U" bit	
Torque wrench		TW1412		14 lbf-in 1.58 N·m	
Connector compression options	Compression tool		Frameset		Insert
	HCG-CC (RP 240 / RP 210-B / RP 100-B)		HCG-FS-12-01		HCG-INS2-12-01 (Insert 2)
HCG-CC (RP 240 / RP 210-B / RP 100-B)		HCG-FRAMESET-1/2		HCG-INSERTA-1/2 (Insert A)	
Frequency band		VSWR		Return loss (dB)	
DC-1000 MHz		1.02		40	
1000-2000 MHz		1.03		36	
2000-4000 MHz		1.05		32	
4000-6000 MHz		1.08		28	
Electrical		Specification		Comment	
Connector impedance		50 ohm			
Operating frequency band		DC-6 GHz			
3rd order IMD dynamic, (PIM)		-161 dBc, typical		IEC 62037-2	
DC test voltage		2000 V			
Center contact resistance		≤ 1.5 milliohm			
Outer contact continuity		0.3 milliohm max.			
Average power		600 W @ 900 MHz			
Peak power, max.		10 kW			
Insertion loss, typical		0.05 dB		Per connector	
Shielding effectiveness		< -120 dB		@ 0-1 GHz	
Mechanical		Specification		Comment	
Pull force combined		1.1 kN >250 lb		Cable limited	
Cable retention torque		6.7 N·m 5 lbf·ft		Cable limited	
Interface durability		500 cycles		IEC 61169-4:9.5	

¹For cable types not listed, please contact JMA Technical Support.





UXP-NRA-12

N Male Right Angle Connector for 1/2" Annular Cable

Environmental	Specification	Test
Operating temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Storage temperature	-55 °C to +85 °C (-67 °F to 185 °F)	
Accelerated UV	1000 hr	ASTM G154
Immersion test method	Mated & unmated, IP68	IEC 60529:2001 & ANSI/SCTE 60
Water jetting test method	Mated & unmated, IP66	IEC 60529:2001
Mechanical shock test method	Pass	IEC 60068-2-27
Thermal shock test method	Pass	IEC 60068-2-14
Vibration test method	100 m/s ² , 2 Hz to 200 Hz	IEC 61169-1:2003
Corrosion test method	1000 hr	IEC 60068-2-11

04/21/26