



WPS-2F-12

Weather Protection System: 2.2-5 Female Antenna Port/ Device Seal

For use with UXP-2MT-12 and UPL-2MT-12 connectors only



[Installation instructions](#)



[WPS cross-reference chart](#)



Contact technical support:


1-888-201-6073

techsupport@jmawireless.com

| General | Specification | Comment |
|---------------------|-----------------------------|---------|
| Ports supported | See figure below. | |
| Dimensions in. (mm) | 01.1 x 0.355 (27.94 x 9.02) | |
| Weight | 0.112 oz 3.2 g | |
| Material | Silicone rubber | |
| Reusability | Unlimited | |

| Environmental | Specification | Comment |
|--------------------------|--|---------------------------------|
| Installation temperature | -40 °C to +65 °C (-40 °F to 149 °F) | |
| Operating temperature | -40 °C to +65 °C (-40 °F to 149 °F) | |
| Storage temperature | -55 °C to +85 °C (-67 °F to 185 °F) | |
| Moisture resistance | No leakage | ANSI/SCTE 60 2004, IP-67, IP-68 |
| Corrosion resistance | 1000 hours | ASTM B117 |
| U.V. resistance | Exposure to UV light for 1000 hours per ASTM G 53 using UVB-313 type lamps | |
| H.A.L.T. | 40 hours | |
| Fire rating | UL94 HB | |

WPS-2F COMPATIBLE PORT SPECIFICATION

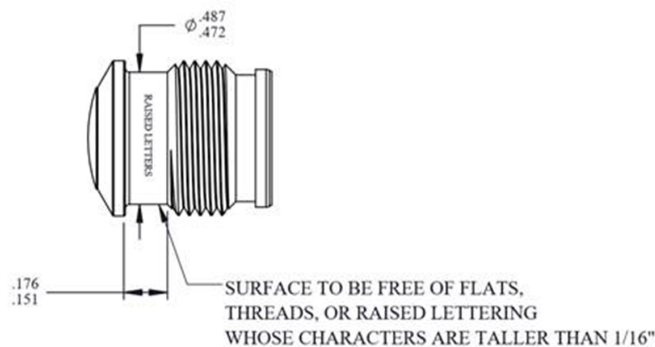

09/23/20