



WPS-2F-14SRA

Weather Protection System: 2.2-5 Right Angle Female Antenna Port/ Device Seal



[Installation instructions](#)



[WPS cross-reference chart](#)




Contact technical support:
1-888-201-6073
techsupport@jmawireless.com

| General | Specification | Comment |
|---------------------|---------------------------|---------|
| Ports supported | See figure below. | |
| Dimensions in. (mm) | 0.87 x 0.47 (22.1 x 11.9) | |
| Weight | 0.096 oz 2.72 g | |
| Material | Silicone rubber | |
| Reusability | Unlimited | |

| Environmental | Specification | Comment |
|--------------------------|--|---------------------------------|
| Installation temperature | -40 °C to +65 °C (-40 °F to 149 °F) | |
| Operating temperature | -40 °C to +65 °C (-40 °F to 149 °F) | |
| Storage temperature | -55 °C to +85 °C (-67 °F to 185 °F) | |
| Moisture resistance | No leakage | ANSI/SCTE 60 2004, IP-67, IP-68 |
| Corrosion resistance | 1000 hours | ASTM B117 |
| U.V. resistance | Exposure to UV light for 1000 hours per ASTM G 53 using UVB-313 type lamps | |
| H.A.L.T. | 40 hours | |
| Fire rating | UL94 HB | |

2.2-5 WPS WPS COMPATIBLE PORT SPECIFICATION

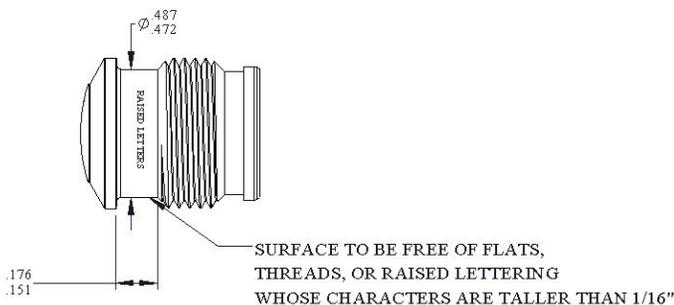

03/05/25