




# WPS-DM-14S

Weather Protection System: 7-16 DIN 1/4" Superflex Connections

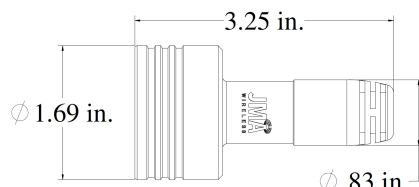

[Installation instructions](#)



[WPS cross-reference chart](#)



Contact technical support:  
1-888-201-6073  
[techsupport@jmawireless.com](mailto:techsupport@jmawireless.com)

General	Specification	Comment
<b>Cables supported</b>	JMA Wireless JMA14S-50, JMA14SP-50 Andrew FSJ1-50A, FSJ1RK-50B, PTS1-50-P RFS SCF14-50J, SCF14-50JFN Hansen RF5014S, RF5014SZ Eupen EC1-50-HF Times SPP-250-LLPL, SPO-250 HUBER+SUHNER SUCOFEEED 1/4 HFFR, 1/4 HF	
<b>Dimensions in. (mm)</b>	3.250 x 1.69 (82.55 x 42.8)	
<b>Weight</b>	0.07 lb   31.2 g	
<b>Material</b>	Silicone rubber	
<b>Lubricant</b>	Dow Corning Molykote® III	
<b>Reusability</b>	Unlimited	

Environmental	Specification	Comment
<b>Installation temperature</b>	-40 °C to +65 °C (-40 °F to 149 °F)	
<b>Operating temperature</b>	-40 °C to +65 °C (-40 °F to 149 °F)	
<b>Storage temperature</b>	-55 °C to +85 °C (-67 °F to 185 °F)	
<b>Moisture resistance</b>	No leakage	ANSI/SCTE 60 2004, IP-67, IP-68
<b>Corrosion resistance</b>	1000 hours	ASTM B117
<b>U.V. resistance</b>	Exposure to UV light for 1000 hours per ASTM G 53 using UVB-313 type lamps	
<b>H.A.L.T.</b>	40 hours	
<b>Fire rating</b>	UL94 HB	

03/05/25

