




# Factory Made Jumpers for Corrugated Cable Data Sheet



Electrical	Specification	Comment
Average Return Loss (VSWR)	-28dB (1.08) 0-2 GHz -25dB (1.12) 2-3 GHz	As per Anatel 75
3rd order IMD	-153 dBc minimum, -160 dBc typical	As per IEC 62037-2, -3
Environmental	Specification	Comment
Operating Temperature	-55°C to +85°C	
Storage Temperature	-55°C to +85°C	
Interface Moisture	No leakage, mated or unmated > 1.0 Bar	
Corrosion Resistance	1000 Hours	
H.A.L.T.	40 Hours	



Example: UXP-DM-12 with JMA WPS

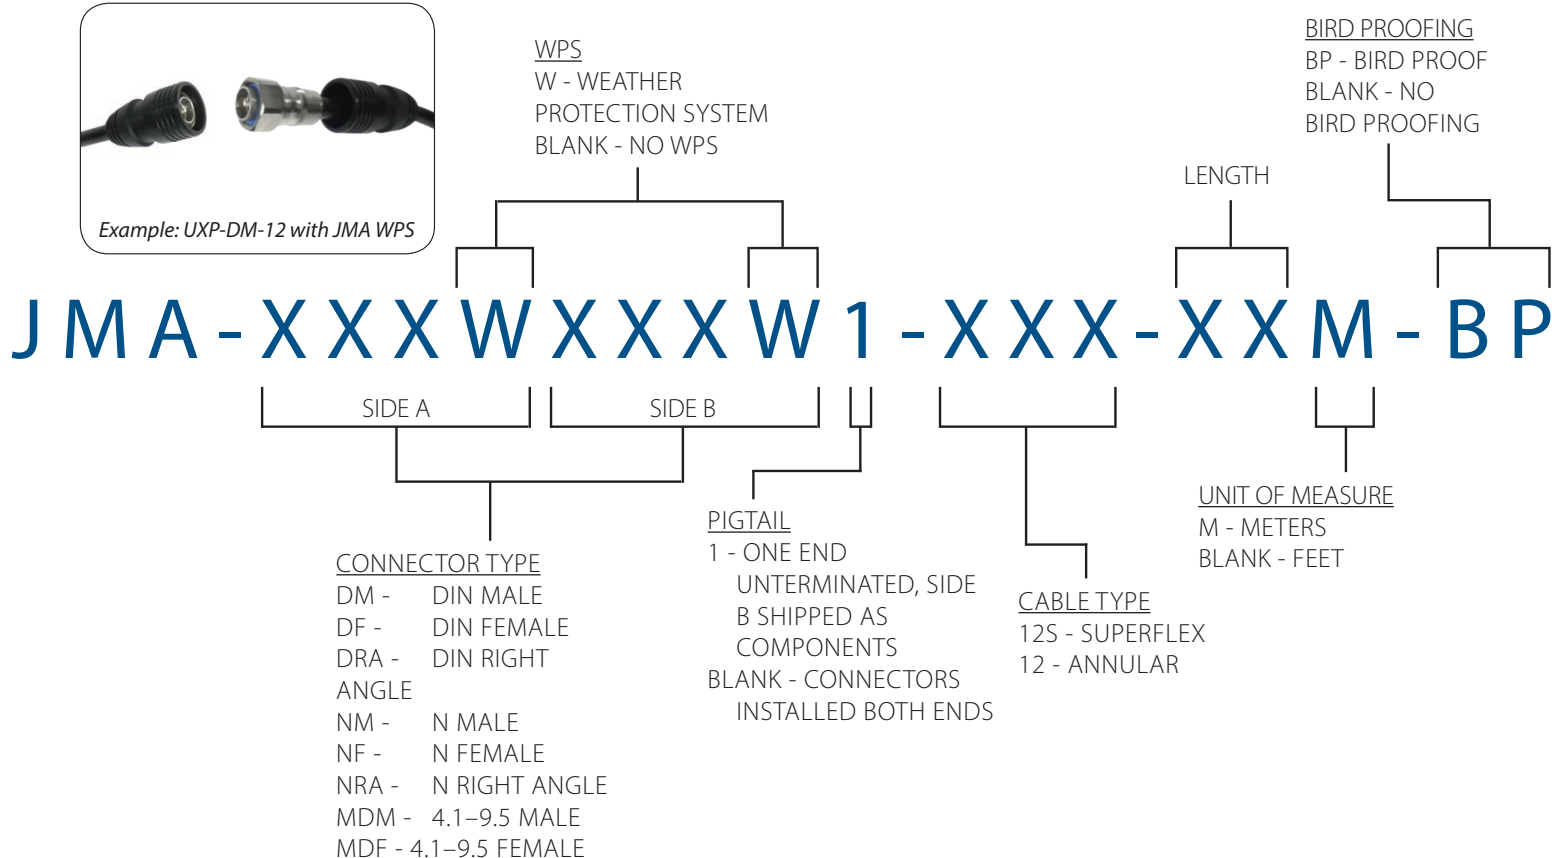

## Jumper Part Number & Description Samples

JMA-DMWDMW-F4-25	Jumper, DIN Male - DIN Male, FSJ4 cable 25 foot, WPS
JMA-DMDM-L12-10	Jumper, DIN Male - DIN Male, LCF-12 cable 10 foot

10-01-2013 revB

7645 Henry Clay Blvd.  
Liverpool, NY 13088

Support Tel: +1 315-431-7100  
Inside US: 1-888-201-6073

customerservice@JMAwireless.com | www.JMAwireless.com

