




CXP-NM-78

N Male Connector for 7/8" Annular Cable

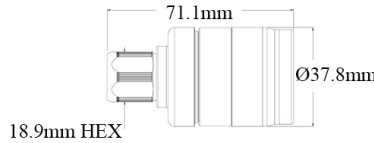

[Installation instructions](#)



Contact technical support:

1-888-201-6073

techsupport@jmawireless.com

General		Specification			
Interface/gender		N Male			
Cables supported¹	CommScope	AVA5	RFS	LCF78	
		AVA5RK		UCF78	
		AL5	LS/Superior Essex	LHF 22D	
		LDF5		LHF-22DU	
		VXL5	NK Draka	RFA78	
	Eupen	EC5	Leoni Flexline	7/8"R	
Hansen	RF5078	Rosenberger	SL 7/8"		
Weight		206.8 g 0.455 lb			
JMA Weather Protection System		N/A			
Tools required		JMA part number		Comment	
Cable preparation		SP-78		No coring required	
Connector compression		HCG-FRAMESET-78, HCG-CC			
Torque wrench		TW1412		1.58 N·m 14 lbf·in	
Frequency band		VSWR		Return loss (dB)	
555–1000 MHz		1.02		40	
1000–2700 MHz		1.03		36	
2700–3800 MHz		1.07		32	
3800–6000 MHz		1.15		28	
Electrical		Specification		Comment	
Connector impedance		50 ohm			
Operating frequency band		DC–6 GHz			
3rd order IMD dynamic, (PIM)		-161 dBc, typical		IEC 62037-2	
DC test voltage		2000 V			
Center contact resistance		≤0.4 milliohm			
Outer contact continuity		1.50 milliohm max.			
Average power		3000 W @ 900 MHz			
Peak power, max.		10 kW			
Insertion loss, typical		0.05 dB		Per connector	
Shielding effectiveness		< -130 dB		@ 0-1 GHz	
Mechanical		Specification		Comment	
Pull force combined		1.56 kN > 350 lb		Cable limited	
Cable retention torque		21.69 N·m 16 lbf·ft		Cable limited	
Interface durability		500 cycles		IEC 61169-4:9.5	
Environmental		Specification		Test	
Operating temperature		-55 °C to +85 °C (-67 °F to 185 °F)			
Storage temperature		-55 °C to +85 °C (-67 °F to 185 °F)			
Accelerated UV		1000 hr		ASTM G154	
Immersion test method		Mated & unmated, IP68		IEC 60529:2001 & ANSI/SCTE 60	
Water jetting test method		Mated & unmated, IP66		IEC 60529:2001	
Mechanical shock test method		Pass		IEC 60068-2-27	
Thermal shock test method		Pass		IEC 60068-2-14	
Vibration test method		100 m/s ² , 2 Hz to 200 Hz		IEC 61169-1:2003	
Corrosion test method		750 hr		IEC 60068-2-11	

¹For cable types not listed, please contact JMA Technical Support.

08/17/23