


NOTES:

1. All hardware to be torqued to 15 ft-lbs after mechanical downtilt is set.
2. See Detail "C" for pole alignment instruction.
3. The bracket kit includes galvanized hardware and a set of SST nuts. SST nuts must be used on antenna-side brackets that attaches to the antenna as shown.

919036 BRACKET KIT, INSTALLATION, 2-POINT, 12DEG D-TILT (OPTIONAL 4.5IN OD POLE)

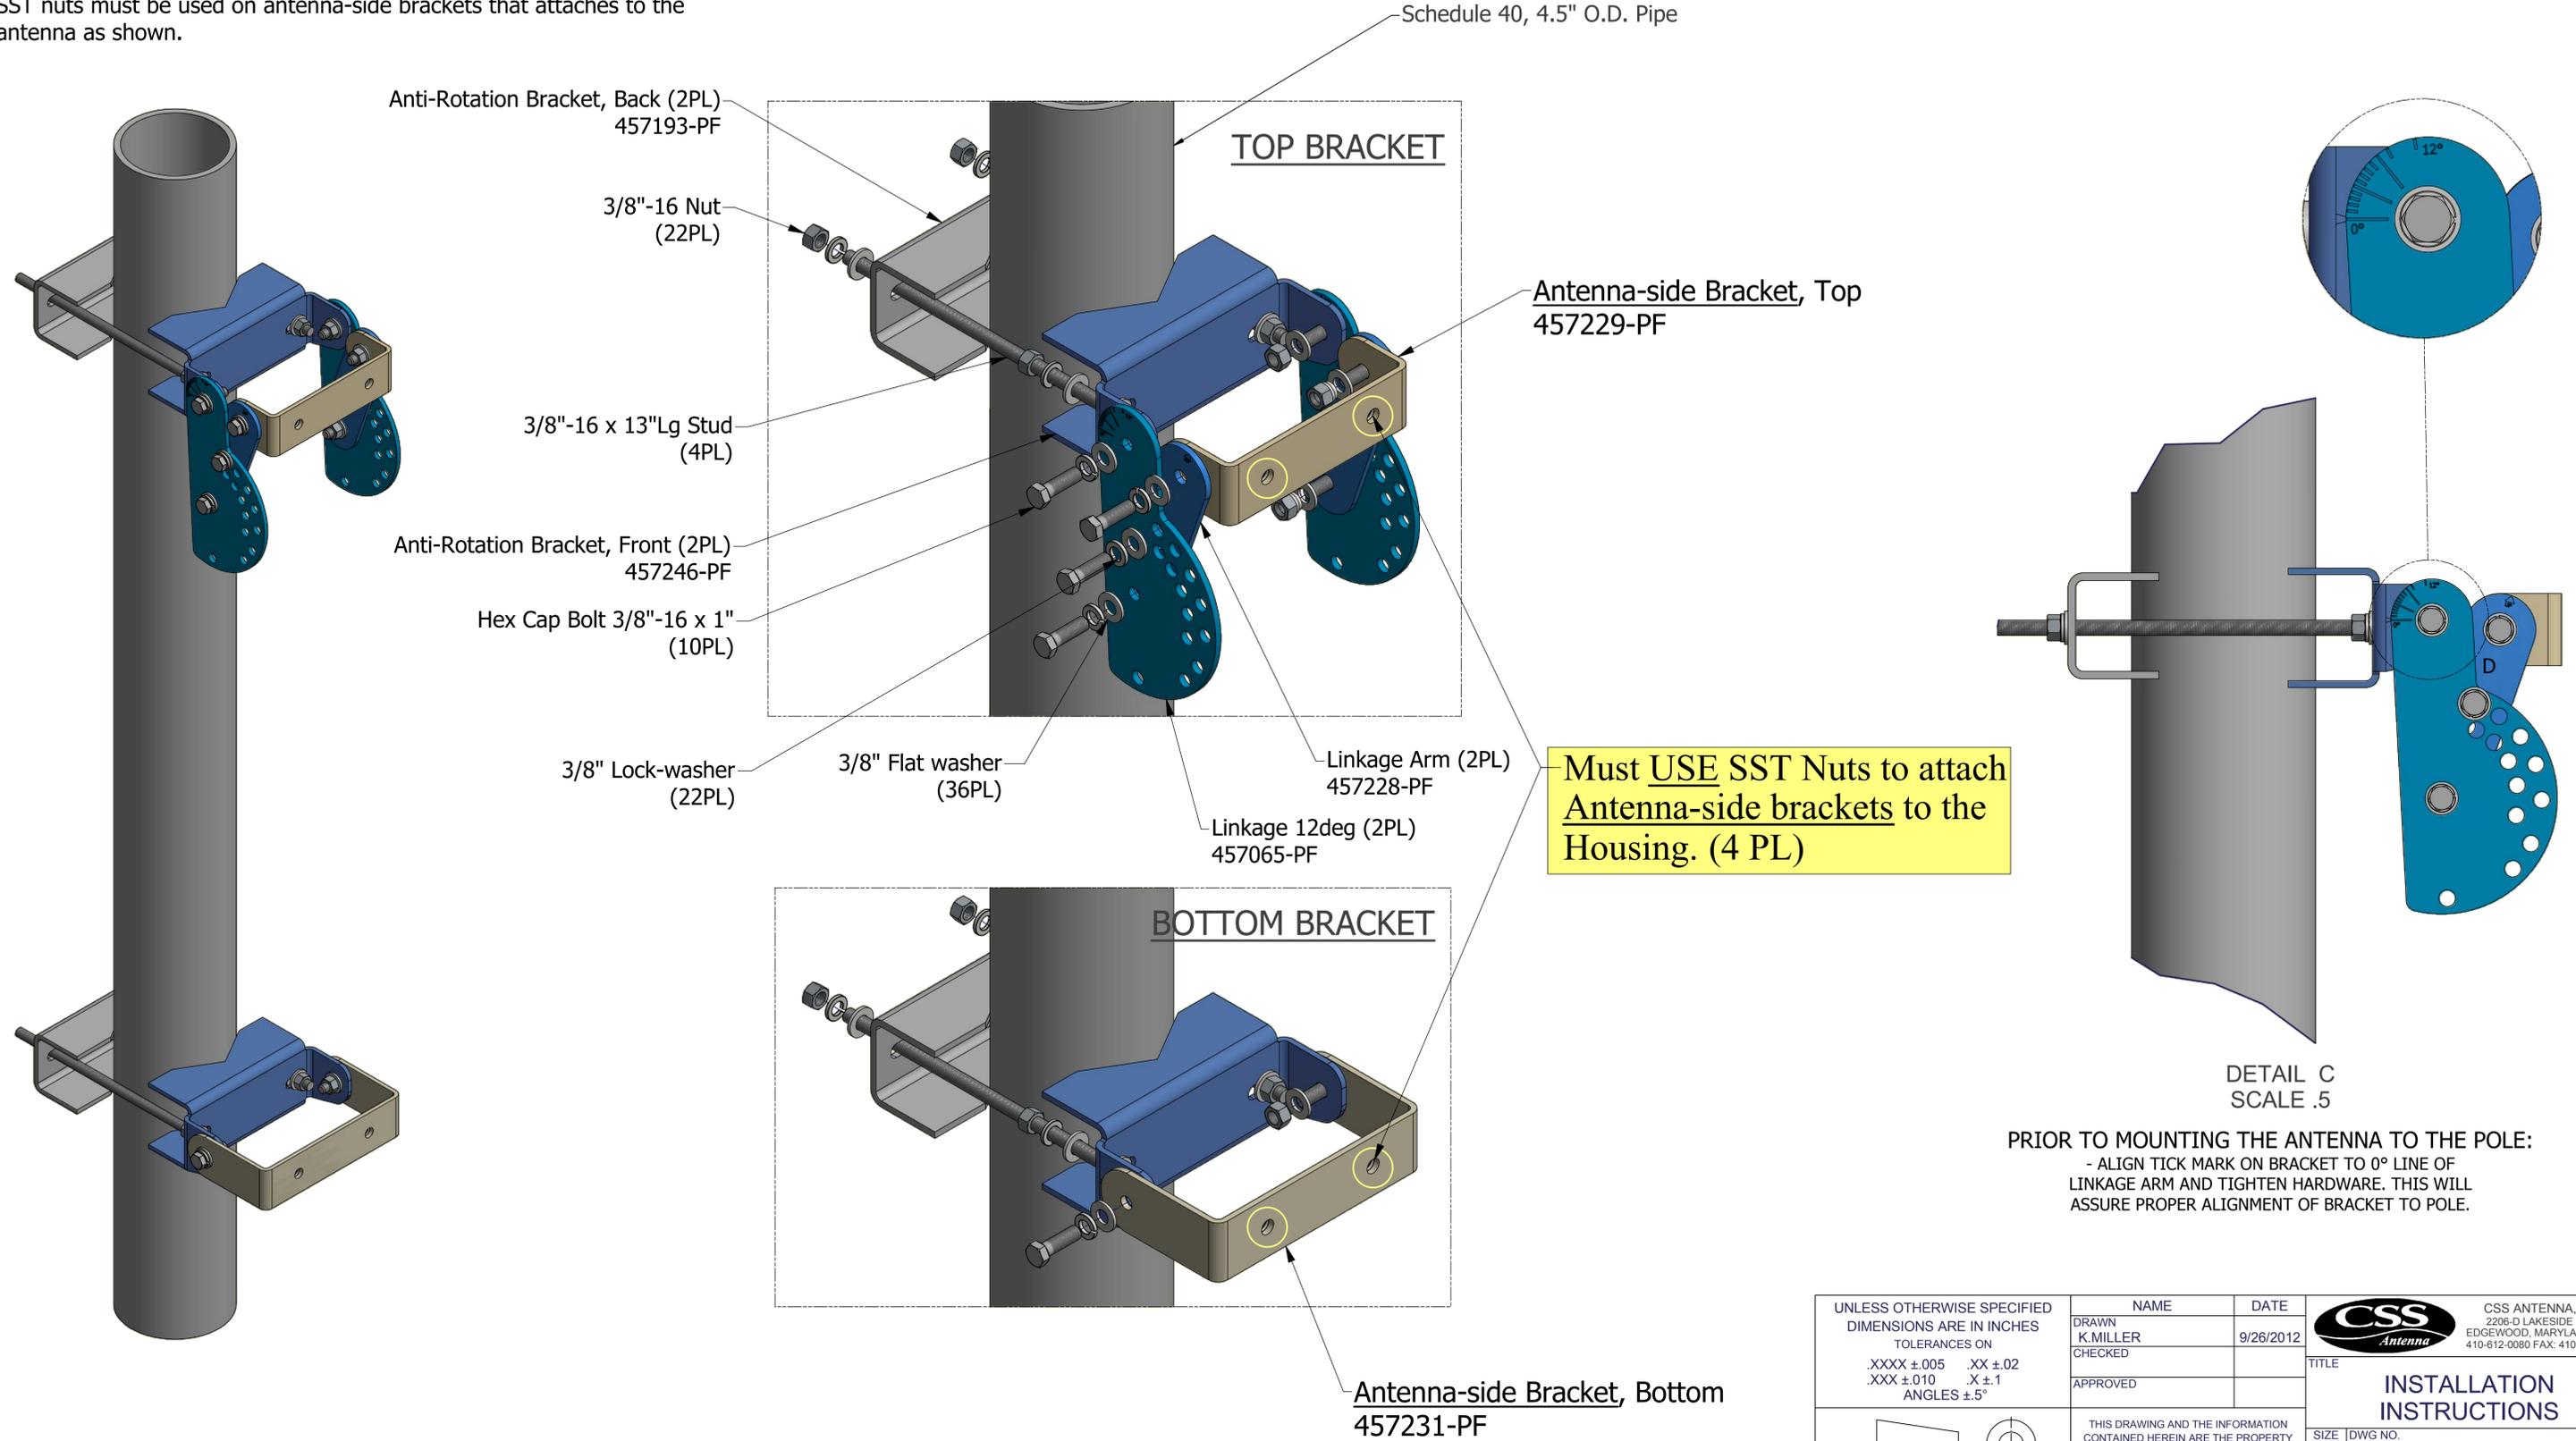

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON .XXXX ±.005 .XX ±.02 .XXX ±.010 .X ±.1 ANGLES ±.5°	NAME	DATE	CSS ANTENNA, INC. 2206-D LAKESIDE BLVD EDGEWOOD, MARYLAND 21040 410-612-0080 FAX: 410-612-0336
	DRAWN K.MILLER	9/26/2012	
	CHECKED		
	APPROVED		TITLE INSTALLATION INSTRUCTIONS
THIRD ANGLE PROJECTION	THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE THE PROPERTY OF CSS ANTENNA, INC. AND SHALL NOT BE REPRODUCED OR USED IN ANY WAY WITHOUT WRITTEN PERMISSION		SIZE DWG NO. 819036-ID REV SCALE FILE SH OF 1